

Polarization Maintaining Faraday Mirror (GK-PMFM Series)

● Description

The Polarization Maintaining Faraday Mirror is a passive device that provides 90 degree rotation regarding to the polarization state of the input light. The PMFM offers excellent performance including the lowest possible insertion loss and environmental stability.


It is used in amplifiers, fiber lasers and fiber instruments to minimize the polarization effect.

● Specifications

Parameter	Unit	Value
Center Wavelength (λ_c)	nm	1310, 1480, 1550
Operating Wavelength Range	nm	$\lambda_c \pm 15$
Typ. Insertion Loss	dB	0.4
Max. Insertion Loss	dB	0.6
Faraday Rotation Angle (single pass)	degree	45
Max. Rotation Angle Tolerance, λ_c , 23 °C	degree	± 1
Min. Extinction Ratio	dB	20
Fiber Type	-	PM Panda Fiber
Max. Optical Power (Continuous Wave)	mW	300
Max. Tensile Load	N	5
Operating Temperature	°C	- 5 to + 70
Storage Temperature	°C	- 40 to + 85

¹IL is 0.3 dB higher, RL is 5 dB lower, and ER is 2 dB lower for each connector added.
Connector key is aligned to slow axis.

● Package Dimensions

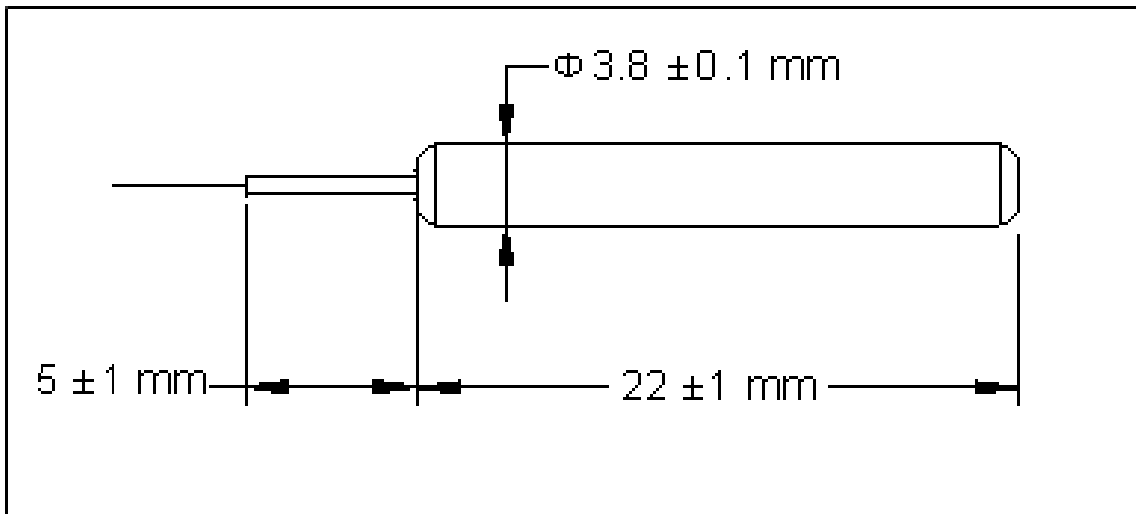

● Ordering Information

GK-PMFM-①-②-③-④

①: Wavelength

31 - 1310 nm
48 - 1480 nm
55 - 1550 nm
SS - Specify

②: Fiber Jacket

B - 250 μ m Bare Fiber
L - 900 μ m Loose Tube
S - Specify

③: Connector Type

1 - FC/UPC
2 - FC/APC
3 - SC/UPC
4 - SC/APC
N - None
S - Specify

④: Fiber Length

Q - 0.75 m
S - Specify