




Optical Fiber Mirror (GK-OFM Series)

● Specifications

Parameter	Unit	Value
Center Wavelength (λ_c)	nm	1310, 1550 1064
Operating Wavelength Range	nm	± 20
Typ. Insertion Loss	dB	0.4 0.5
Max. Insertion Loss	dB	0.5 0.7
Max. Polarization Dependent Loss	dB	0.05
Max. Optical Power (Continuous Wave)	mW	300
Max. Tensile Load	N	5
Fiber Type	-	SMF-28 Fiber HI 1060 Fiber
Operating Temperature	°C	- 5 to + 70
Storage Temperature	°C	- 40 to + 85

¹IL is 0.3 dB higher, RL is 5 dB lower for each connector added.

● Package Dimensions

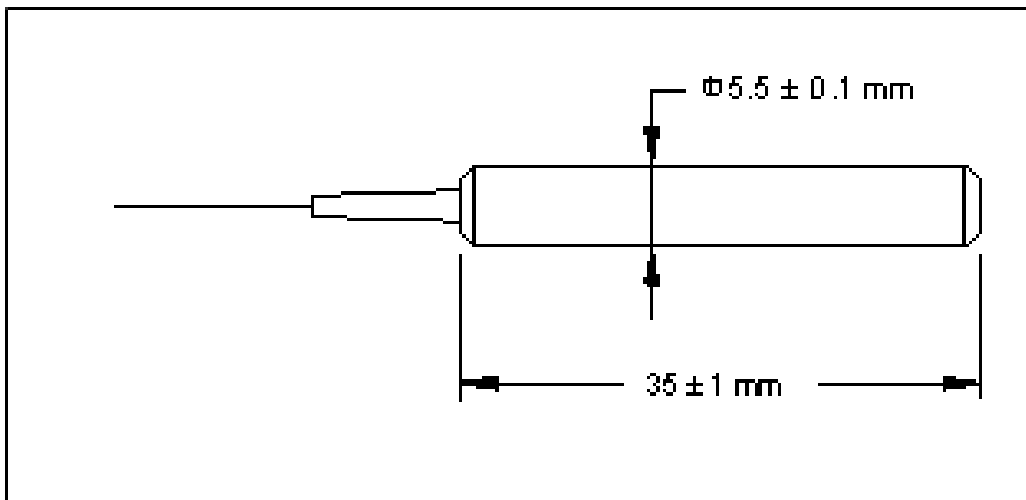

● Ordering Information

GK-OFM-①-②-③-④

①: Wavelength

06- 1064 nm

31- 1310 nm

55 - 1550 nm

SS - Specify

②: Fiber Jacket

B - 250 μ m Bare Fiber

L - 900 μ m Loose Tube

S - Specify

③: Connector Type

1 - FC/UPC

2 - FC/APC

3 - SC/UPC

4 - SC/APC

N - None

S - Specify

④: Fiber Length

1 - 1 m

S - Specify