

## 793/2000 nm (2+1)x1 Multimode Pump & Signal Combiner (MMPC Series)

Rev 11B

### Features

- High Power Transfer Efficiency
- Wavelength Insensitive
- Particular Pulling and Package Technique
- Custom Configurations Available

### Applications

- High Power Fiber Laser
- High Power EDFA
- CATV Amplifier

### Description


- Pump Combiner + Signal Transfers

### Specifications

Parameter	Unit	Value
Product Type	-	(2+1)x1
Pump Wavelength	nm	793
Signal Wavelength	nm	2000
Fiber Type for Input (Pump Channel)	-	Nufern 105/125 (0.15 NA or 0.22 NA)
Fiber Type for Input (Signal Channel)	-	Nufern SM-GDF-10/130-15FA
Fiber Type for Output	-	Nufern SM-GDF-10/130-15FA
Signal Channel Insertion Loss	dB	< 0.60
Typ. Pump Efficiency	%	92
Min. Pump Efficiency	%	90
Max. Input Pump Power	W	2 x 5    2 x 30
Package Dimensions	mm	P1: 50 (L) x 5 (W) x 5 (H)                  P2: 70 (L) x 12 (W) x 8 (H)
Operating Temperature	°C	0 to + 65
Storage Temperature	°C	- 40 to + 85

\*Mode number summation of all input fibers should be less than that of output fiber.

### Package Dimensions

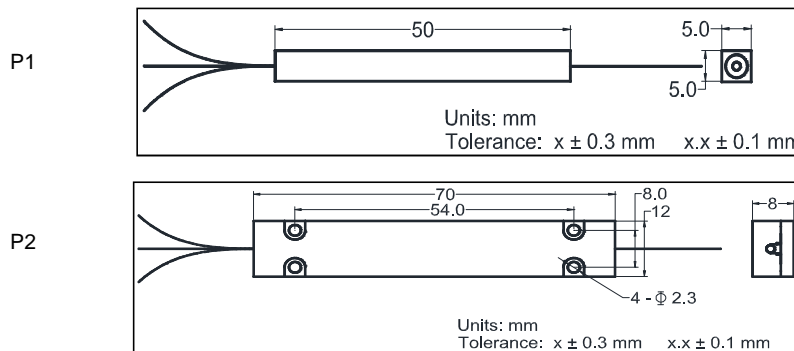

### Ordering Information

**MMPC-(2+1)x1-①①①①-②②②-③③-④④-⑤⑤-⑥⑥-⑦**

①①①①: Signal Wavelength

2000 - 2000 nm

SSSS - Specify

②②②: Pump Wavelength

793 - 793 nm

SSS - Specify

③③: Fiber Type for Pump Input

15 - 105/125 (0.15 NA)

22 - 105/125 (0.22 NA)

④④: Fiber Type for Signal Input

10 - SM-GDF-10/130-15FA

SS - Specify

⑤⑤: Fiber Type for Output

10 - SM-GDF-10/130-15FA

SS - Specify

⑥: Fiber Length

Q - 0.75 m

S - Specify

⑦: Package Type

1 - P1

2 - P2