



(2+1)×1 Polarization Maintaining Pump & Signal Combiner (PMMPC Series)

Rev 11B

Features

- High Coupling Efficiency
- High Signal Transfer Efficiency
- Wide Wavelength Range
- Proprietary Pull and Package Technique
- Custom Configurations Available

Applications

- PM Fiber Laser
- PM Fiber Amplifiers

Description


- Pump Combiner with PM Signal Feedthrough

Specifications

Parameter	Unit	Value	
Product Type	-	PM (2+1)×1	
Pump Wavelength Range	nm	900 - 1000	
Signal Wavelength Range	nm	1060, 1550	
Fiber Type for Input (Pump Channel)	-	Nufern 105/125 (0.15 NA, or 0.22 NA)	
Fiber Type for Input (Signal Channel)	-	PM 980, PM 1550, PM-6/125 DC, or PM-8/125 DC	
Fiber Type for Output	-	PM-6/125 DC, or PM-8/125 DC	
Signal Channel Insertion Loss	dB	< 0.50	
Min. Pump Efficiency	%	90	
Max. Input Pump Power	W	2 × 5	2 × 30
Package Dimensions	mm	P1: 50 (L) × 5 (W) × 5 (H)	P2: 70 (L) × 12 (W) × 8 (H)
Operating Temperature	°C	0 to + 65	
Storage Temperature	°C	- 40 to + 85	

*Mode number summation of all input fibers should be less than that of output fiber.

Package Dimensions

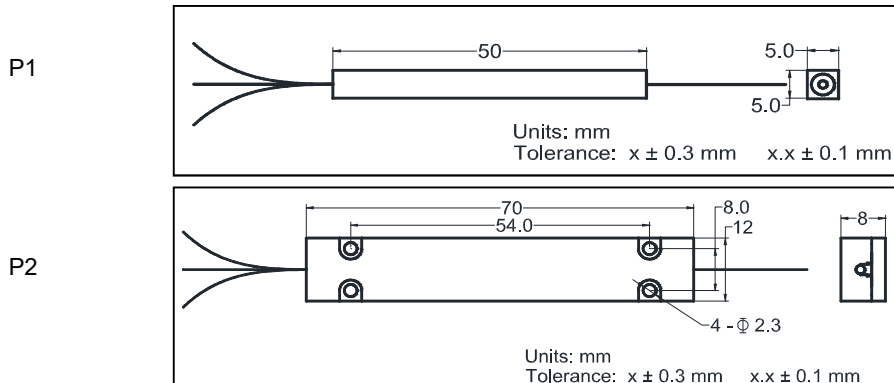

Ordering Information

PMMPC-(2+1)×1-①①-②②②-③③-④④-⑤⑤-⑥-⑦

①①: Signal Wavelength	②②②: Pump Wavelength	③③: Fiber Type for Pump Input	
06 - 1060 nm	915 - 915 nm	15 - 105/125 (0.15 NA)	
55 - 1550 nm	975 - 975 nm	22 - 105/125 (0.22 NA)	
SS - Specify	SSS - Specify		
④④: Fiber Type for Signal Input	⑤⑤: Fiber Type for Output	⑥: Fiber Length	⑦: Package Type
06 - PM-GDF-6/125-M	06 - PM-GDF-6/125-M	Q - 0.75m	1 - P1
08 - CorActive DCF-UN-8/125-14-PM	08 - CorActive DCF-UN-8/125-14-PM	1 - 1.0 m	2 - P2
SS - Specify	SS - Specify	S - Specify	