



(6+1)×1 PM Pump & Signal Combiner (GK-PMMPD Series)

● Description

Pump Combiner with PM Signal Feedthrough

● Features

- High Coupling Efficiency
- High Signal Transfer Efficiency
- Wide Wavelength Range
- Proprietary Pull and Package Technique
- Custom Configurations Available

● Applications

PM Fiber Laser


PM Fiber Laser

● Specifications

Parameter	Unit	Value
Product Type	-	PM (6+1)×1
Pump Wavelength Range	nm	900 - 1000
Signal Wavelength Range	nm	1060, 1550
Fiber Type for Input (Pump Channel)	-	Nufern 105/125 (0.15 NA, or 0.22 NA)
Fiber Type for Input (Signal Channel)	-	PM 980, PM 1550, PM-6/125 DC, or PM-8/125 DC
Fiber Type for Output	-	PM-10/125 DC, or PM-20/125 DC
Signal Channel Insertion Loss	dB	< 0.80
Min. Pump Efficiency	%	94 (Typ.95)
Max. Input Pump Power	W	6 × 50 6 × 100
Package Dimensions	mm	P2: 70 (L) × 12 (W) × 8 (H) P5: 100 (L) × 15 (W) × 10 (H)
Operating Temperature	°C	0 to + 65
Storage Temperature	°C	- 40 to + 85

¹Mode number summation of all input fibers should be less than that of output fiber.

● Package Dimensions

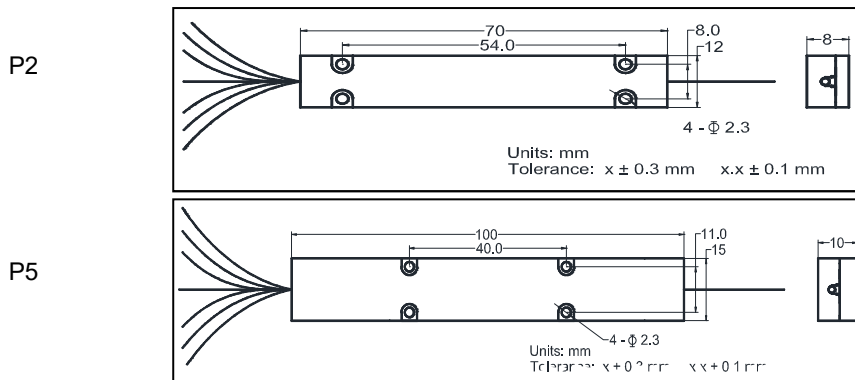

● Ordering Information

GK-PMMP- (6+1) × 1 - ① - ② - ③ - ④ - ⑤ - ⑥ -

①: Signal Wavelength

06 - 1060 nm

55 - 1550 nm

SS - Specify

②: Pump Wavelength

915 - 915 nm

975 - 975 nm

SSS - Specify

③: Fiber Type for Pump Input

15 - 105/125 (0.15 NA)

22 - 105/125 (0.22 NA)

④: Fiber Type for Signal Input

06 - PM-6/125 DC

08 - PM-8/125 DC

SS - Specify

⑤: Fiber Type for Output

10 - PM-10/125 DC

20 - PM-20/125 DC

SS - Specify

⑥: Fiber Length

Q - 0.75 m

1 - 1.0 m

S - Specify

⑦: Package Type

2 - P2

5 - P5