



Multimode Patchcord (GK-MMP Series)

● Description


The Multimode Patchcord Series has excellent environmental stability, high return loss and low insertion loss. It is ideal for multimode fiber lasers and test instrumentation applications.

● Specifications

Parameter	Unit	Value
Operating Wavelength	nm	980, 1060, 1310, 1550, or specified
Typ. Insertion Loss	dB	0.2
Max. Insertion Loss	dB	0.3
Min. Return Loss	dB	25
Max. Optical Power (Continuous Wave)	mW	300
Fiber Length Tolerance	%	± 10 or specified
Operating Temperature	°C	- 5 to + 70
Storage Temperature	°C	- 40 to + 85

¹IL is 0.1 dB higher for 980 & 1060 nm.

● Package Dimensions

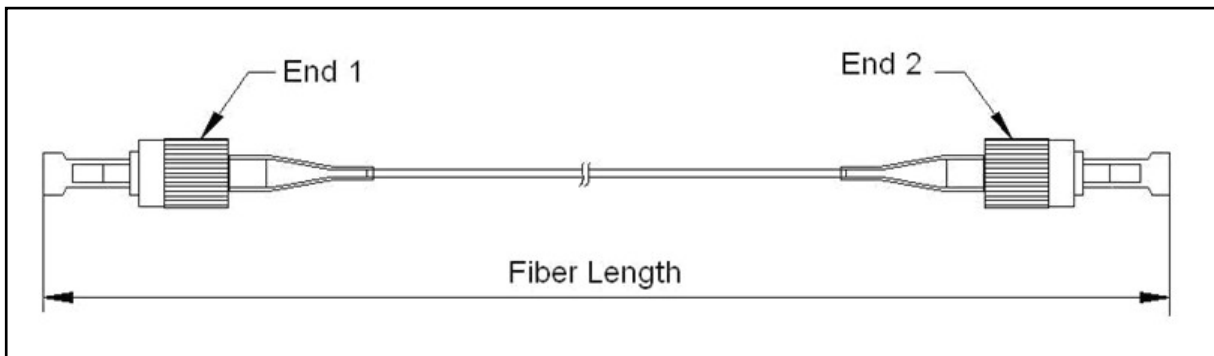

● Ordering Information

GK-MMP-①-②-③-④-⑤-⑥

①: Wavelength

98 - 980 nm
06 - 1060 nm
31 - 1310 nm
55 - 1550 nm
SS - Specify

②: Key Width(for FC Type)

R - 2.02 mm

③: Connector Type

1 - FC/UPC
2 - FC/APC
3 - SC/UPC
4 - SC/APC
N - None
S - Specify

④: Fiber Jacket

B - 250 μ m Bare Fiber
L - 900 μ m Loose Tube
2 - 2 mm Cable
3 - 3 mm Cable
S - Specify

⑤: Fiber Length

1 - 1.0 m
S - Specify

⑥: Fiber Type

1 - 105 μ m NA 0.15
2 - 105 μ m NA 0.22
3 - 62.5 μ m
4 - 50 μ m
S - Specify