



SPECIFICATION	
COATING	PROTECTED SILVER
CLEAR APERTURE	90%
SCRATCH-DIG	40-20
FLATNESS	LAMBDA/10 @632.8NM
REFLECTIVITY	>97.5% 450-2000NM >96% 2000-20000NM
PARALLELISM	<3 ARCMIN
DAMAGE THRESHOLD	3J/cm <sup>2</sup> 10ns PULSE, 10Hz AT 1064nm
ENGRAVING	MIR010-S01

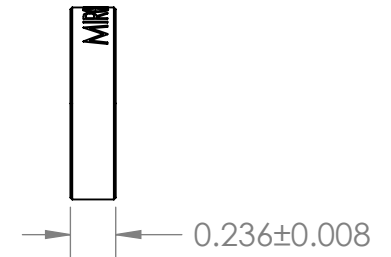

**MIR010-S01**

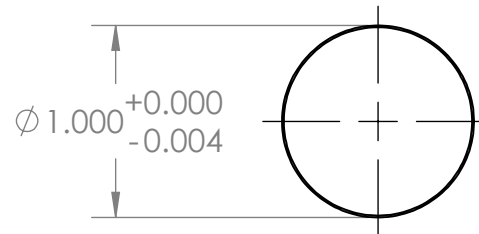

	NAME	DATE	<b>BASE OPTICS INC</b>		
DRAWN	LS	08/21/12			
APPROVED	JM	08/23/12	TITLE:		
MATERIAL FUUSED SILICA			<b>1" PROTECTED SILVER MIRROR</b>		
FINISH FINE GROUND					
NOTE NO ENGRAVING ON BACK SURFACE OF THE MIRROR			SIZE <b>A</b>	ITEM NO. MIR010-S01	REV <b>A</b>
COPYRIGHT © 2012 BY BASE OPTICS			SCALE: 1:1	WEIGHT: 0.02 lbs	SHEET 1 OF 1

FOR INFORMATION ONLY  
NOT FOR MANUFACTURING  
ITEM / DRAWING IS SUBJECT TO CHANGES WITOUT NOTIFICATION