


BeamPro

BeamPro is the **most comprehensive range** of laser beam profilers available on the market. All the cameras have been carefully **qualified and selected by laser experts** to successfully address any beam profiling requirement, based on decisive criteria like pixel size, detection area, wavelength range, compactness or budget. Powered by a dedicated **full-featured, automatically updated, beam profiling software**, BeamPro is a high-performance, user-friendly and tailored solution, delivering **reliable and reproducible measurements** for any application.

BeamPro




Models :



- ◆ **Small pixels** : down to 1.40 μm
- ◆ **Large area** : beams up to 30 mm in diameter
- ◆ **Compact footprint** : less than 15 mm thickness
- ◆ **SWIR range** : 400 to 1700 nm wavelengths

Options

- ◆ Windowless
- ◆ UV extension (down to 190 nm)
- ◆ Additional ND filters (OD1 to OD4)
- ◆ High Dynamic Range
- ◆ Vacuum compatible versions (not available for all models)
- ◆ Trigger



BeamPro small pixels


Pixel size from 1.40 μm up to 3.45 μm

| Models | μ -BP7.5+ | LP6.3+ | BP7.6+ | BP13.9+ | BP6.5 | BP11.10 | μ -BP6.4 | μ -BP7.4 | BP8.7 | |
|---|---|------------------------|-----------------------|-----------------------|------------------------|-------------------------|------------------------|------------------------|------------------------|---------|
| Pixel size (μm) ↗ | 1.40 | 1.45 | 1.85 | 2.40 | 2.50 | 2.50 | 3.00 | 3.45 | 3.45 | |
| Spectral range (nm) | 375 – 1100 190 – 1100 with UV option | | | | | | | | | |
| Sensor size (mm) | 7.2 x 5.4 | 5.6 x 3.1 | 7.4 x 5.5 | 13.1 x 8.7 | 6.5 x 5.4 | 11.3 x 10.2 | 5.8 x 3.6 | 6.6 x 4.2 | 8.5 x 7.1 | |
| Sensor format | M 1/1.8" | S 1/3" | M 1/1.7" | L 1" | M 1/2" | L 1" | S 1/3" | M 1/2.3" | L 2/3" | |
| Resolution | 5136 x 3856 19.8 Mpx | 3864 x 2176 8.4 Mpx | 4000 x 3000 12 Mpx | 5472 x 3648 20 Mpx | 2600 x 2160 5.6 Mpx | 4508 x 4096 18.4 Mpx | 1920 x 1200 2.3 Mpx | 1920 x 1200 2.3 Mpx | 2456 x 2054 5.0 Mpx | |
| Shutter type | Rolling | Rolling | Rolling | Rolling | Global | Global | Global | Global | Global | |
| Minimum beam diameter (\varnothing FWHM, μm) ¹ | 6 | 7 | 9 | 12 | 12 | 12 | 15 | 17 | 17 | |
| Maximum acquisition frame rate (fps) ² | 15 | 24 | 31 | 18 | 64 | 20 | 102 | 160 | 36 | |
| Exposure time | min (μs) max (s) | 35 ³ 1 | 31 ³ 1 | 10 ³ 1 | 67 ³ 1 | 200 1 | 500 1 | 12 1 | 17 1 | 27 1 |
| Dynamic (dB) | 58 | 70 | 70 | 72 | 71 | 64 | 58 | 71 | 73 | |
| Price | ■ ■ | ■ ■ | ■ ■ | ■ ■ | ■ ■ | ■ ■ ■ | ■ ■ | ■ | ■ ■ | |
| Sensor type | CMOS | | | | | | | | | |
| Bit depth | 12 / 16 (with HDR option) | | | | | | | | | |
| PC Interface | USB 3.1 | | | | | | | | | |
| Synchronization | Yes (with the Trigger option) | | | | | | | | | |
| Dimensions (mm) | 33 x 29 x 10 | 40 x 45 x 12 | 36 x 39 x 46 | 36 x 39 x 46 | 36 x 39 x 46 | 36 x 39 x 46 | 33 x 29 x 10 | 33 x 29 x 10 | 36 x 39 x 46 | |

¹ The minimum beam diameters are specified for a precision of measurement better than 1%. Smaller beam diameter can be measured but the error will progressively increase












² Depending on the type of calculation, frame rate may vary

³ Due to rolling shutter, the actual minimum exposure time to capture the whole beam will be limited by the beam size. The larger the beam, the longer the required minimum exposure time



BeamPro large area


Beam diameters from 10 mm up to 30 mm

| Models | BP12.10 | BP11.10 | SWIR 13.10 | BP11.11 | SWIR 22.18 | BP25.16 | BP25.16 UV | BPΦ25 | BPΦ25 UV | VSWIR 19.15 | SWIR 38.30 |
|---|--|---|---|---|---|---|---|--|--|---|---|
| Sensor size (mm) |  12.4 x 9.8 |  11.3 x 10.2 |  12.8 x 10.2 |  11.2 x 11.2 |  22.0 x 17.6 |  25.0 x 16.1 |  25.0 x 16.1 |  Φ 25.0 |  Φ 25.0 |  19.3 x 15.3 |  38.4 x 30.6 |
| Sensor format | L 1" | L 1" | L 1" | L 1" | L+ APS-C | L+ 4/3" | L+ 4/3" | L+ Φ | L+ Φ | L+ 1.5" | L+ Full Frame |
| Spectral range (nm) | 375 - 1100 190 - 1100 with UV option | | 900 - 1700 | 375 - 1100 190 - 1100 with UV option | 900 - 1700 | 375 - 1100 | 200 - 750 | 375 - 1100 | 200 - 750 | 400 - 1700 | 900 - 1700 |
| Resolution | 2592 x 2048 5.3 Mpx | 4508 x 4096 18.4 Mpx | 1280 x 1024 1.3 Mpx | 2048 x 2048 4.2 Mpx | 640 x 512 0.3 Mpx | 1920 x 1200 2.3 Mpx | 1920 x 1200 2.3 Mpx | 2048 x 2048 4.2 Mpx | 2048 x 2048 4.2 Mpx | 1296 x 1032 1.3 Mpx | 1280 x 1024 1.3 Mpx |
| Pixel size (μm) | 4.80 | 2.50 | 10.0 | 5.50 | 33.00 | 13.48 | 13.48 | 12.65 | 12.65 | 15.0 | 30.0 |
| Shutter type | Global | Global | Global | Global | Global | Global | Global | Global | Global | Global | Global |
| Minimum beam diameter (∅ FWHM, μm) ¹ | 24 | 12 | 50 | 29 | 23 | 68 | 68 | 63 | 63 | 200 | 500 |
| Maximum acquisition frame rate (fps) ² | 73 | 20 | 60 | 80 | 230 | 47 | 47 | 80 | 18 | 128 | 60 |
| Exposure time | min (μs) max (s) | 52 0.5 | 500 1 | 10 0.5 | 40 1 | 10 0.5 | 20 1 | 20 1 | 40 1 | 20 0.5 | 10 0.5 |
| Dynamic (dB) | 56 | 64 | 61 | 58 | 63 | 70 | 70 | 58 | 71 | 56 | 61 |
| Price | ■ ■ | ■ ■ ■ ■ | ■ ■ ■ ■ ■ | ■ ■ | ■ ■ ■ ■ ■ | ■ ■ ■ ■ | ■ ■ ■ ■ | ■ ■ ■ ■ | ■ ■ ■ ■ ■ | ■ ■ ■ ■ ■ | ■ ■ ■ ■ ■ |
| Sensor type | CMOS | | InGaAs | CMOS | InGaAs | CMOS | CMOS | CMOS | CMOS | InGaAs | |
| Bit depth | 12 / 16 (with HDR option) | 12 / 16 (with HDR option) | 14 | 12 / 16 (with HDR option) | 14 | 12 / 16 (with HDR option) | 12 / 16 (with HDR option) | 12 / 16 (with HDR option) | 12 / 16 (with HDR option) | 12 | 14 |
| PC Interface | USB 3.1 | | | | | | | | | | |
| Synchronization | Yes (with the Trigger option) | | | | | | | | | | |
| Dimensions (mm) | 36 x 39 x 46 | 36 x 39 x 46 | 58 x 58 x 70 | 36 x 39 x 46 | 46 x 46 x 57 | 37 x 40 x 55 | 37 x 40 x 55 | 37 x 40 x 55 | 37 x 40 x 55 | 33 x 40 x 46 | 58 x 58 x 80 |

¹ The minimum beam diameters are specified for a precision of measurement better than 1%. Smaller beam diameter can be measured but the error will progressively increase






² Depending on the type of calculation, frame rate may vary

³ Due to rolling shutter, the actual minimum exposure time to capture the whole beam will be limited by the beam size. The larger the beam, the longer the required minimum exposure time



BeamPro compact footprint

Less than 15 mm thickness

| Models | μ-BP7.5+ | LP6.3+ | μ-BP6.4 | μ-BP7.4 | μ-BP7.5 |
|---|---|---|---|---|---|
| Pixel size (μm) ↗ | 1.40 | 1.45 | 3.00 | 3.45 | 4.50 |
| Spectral range (nm) | 375 – 1100 190 – 1100 with UV option | | | | |
| Sensor size (mm) |  7.2 x 5.4 |  5.6 x 3.1 |  5.8 x 3.6 |  6.6 x 4.2 |  7.2 x 5.4 |
| Sensor format | M 1/1.8" | S 1/3" | S 1/3" | M 1/2.3" | M 1/1.8" |
| Resolution | 5136 x 3856 19.8 Mpx | 3864 x 2176 8.4 Mpx | 1920 x 1200 2.3 Mpx | 1920 x 1200 2.3 Mpx | 1600 x 1200 2.0 Mpx |
| Shutter type | Rolling | Rolling | Global | Global | Global |
| Minimum beam diameter (Ø FWHM, μm) ¹ | 6 | 7 | 15 | 17 | 23 |
| Maximum acquisition frame rate (fps) ² | 15 | 24 | 102 | 160 | 60 |
| Exposure time | min (μs) 35 ³ max (s) 1 | min (μs) 31 ³ max (s) 1 | min (μs) 12 max (s) 1 | min (μs) 17 max (s) 1 | min (μs) 20 max (s) 1 |
| Dynamic (dB) | 58 | 70 | 58 | 71 | 49 |
| Price | ■ ■ | ■ ■ | ■ ■ | ■ | ■ ■ |
| Sensor type | CMOS | | | | |
| Bit depth | 12 / 16 (with HDR option) | | | | |
| PC Interface | USB 3.1 | | | | |
| Synchronization | Yes (with the Trigger option) | | | | |
| Dimensions (mm) | 33 x 29 x 10 | 40 x 45 x 12 | 33 x 29 x 10 | 33 x 29 x 10 | 33 x 29 x 10 |

¹ The minimum beam diameters are specified for a precision of measurement better than 1%. Smaller beam diameter can be measured but the error will progressively increase









² Depending on the type of calculation, frame rate may vary

³ Due to rolling shutter, the actual minimum exposure time to capture the whole beam will be limited by the beam size. The larger the beam, the longer the required minimum exposure time



BeamPro SWIR range


Wavelength from 400 to 1700 nm

| Models | VSWIR 3.2 | SWIR 5.4 | VSWIR 6.5 | SWIR 10.8 | SWIR 13.10 | VSWIR 19.15 | SWIR 22.18 | SWIR 38.30 |
|---|---|---|---|---|---|---|---|---|
| Sensor size (mm) ↗ |  |  |  |  |  |  |  |  |
| | 3.3 x 2.6 | 4.8 x 3.8 | 6.5 x 5.2 | 9.6 x 7.7 | 12.8 x 10.2 | 19.3 x 15.3 | 22.0 x 17.6 | 38.4 x 30.6 |
| Sensor format | S 1/4" | S 1/2" | M 1/2" | L 1" | L 1" | L+ 1.5" | L+ APS-C | L+ Full Frame |
| Spectral range (nm) | 400 - 1700 | 900 - 1700 | 400 - 1700 | 900 - 1700 | 900 - 1700 | 400 - 1700 | 900 - 1700 | 900 - 1700 |
| Resolution | 656 x 520 0.3 Mpx | 320 x 256 0.08 Mpx | 1296 x 1032 1.3 Mpx | 640 x 512 0.3 Mpx | 1280 x 1024 1.3 Mpx | 1296 x 1032 1.3 Mpx | 640 x 512 0.3 Mpx | 1280 x 1024 1.3 Mpx |
| Pixel size (µm) | 5.0 | 15.0 | 5.0 | 15.0 | 10.0 | 15.0 | 34.5 | 30.0 |
| Shutter type | Global | Global | Global | Global | Global | Global | Global | Global |
| Minimum beam diameter (Ø FWHM, µm) ¹ | 25 | 75 | 25 | 75 | 50 | 200 | 500 | 500 |
| Maximum acquisition frame rate (fps) ² | 240 | 1000 | 128 | 230 | 60 | 128 | 230 | 60 |
| Exposure time min (µs) max (s) | 20 0.5 | 10 0.5 | 20 0.5 | 10 0.5 | 10 0.5 | 20 0.5 | 10 0.5 | 10 0.5 |
| Dynamic (dB) | 56 | 63 | 56 | 63 | 61 | 56 | 63 | 61 |
| Price | ■■■■ | ■■■■ | ■■■■ | ■■■■ | ■■■■ | ■■■■ | ■■■■ | ■■■■ |
| Sensor type | InGaAs | | | | | | | |
| TE Cooling | No / Yes (option) | Yes | No / Yes (option) | Yes | Yes | No | Yes | Yes |
| Bit depth | 12 | 14 | 12 | 14 | 14 | 12 | 14 | 14 |
| PC Interface | USB 3.1 (uncooled) GigE (TE-cooled) | USB 3.1 | USB 3.1 (uncooled) GigE (TE-cooled) | USB 3.1 | USB 3.1 | USB 3.1 | USB 3.1 | USB 3.1 |
| Synchronization | Yes (with the Trigger option) | | | | | | | |
| Dimensions (mm) | 31 x 37 x 25 (uncooled) 78 x 55 x 55 (TE cooled) | 46 x 46 x 57 | 31 x 37 x 25 (uncooled) 78 x 55 x 55 (TE cooled) | 46 x 46 x 57 | 58 x 58 x 70 | 33 x 40 x 46 | 46 x 46 x 67 | 58 x 58 x 80 |

¹ The minimum beam diameters are specified for a precision of measurement better than 1%. Smaller beam diameter can be measured but the error will progressively increase

² Depending on the type of calculation, frame rate may vary

Thanks to a highly optimized C++ and Java architecture, the STAR software is fast, touchscreen-enabled, intuitive and user-friendly. **It also offers a unique automatic update mode, which ensures users to always use the latest version, for free, effortlessly and lifetime ...**

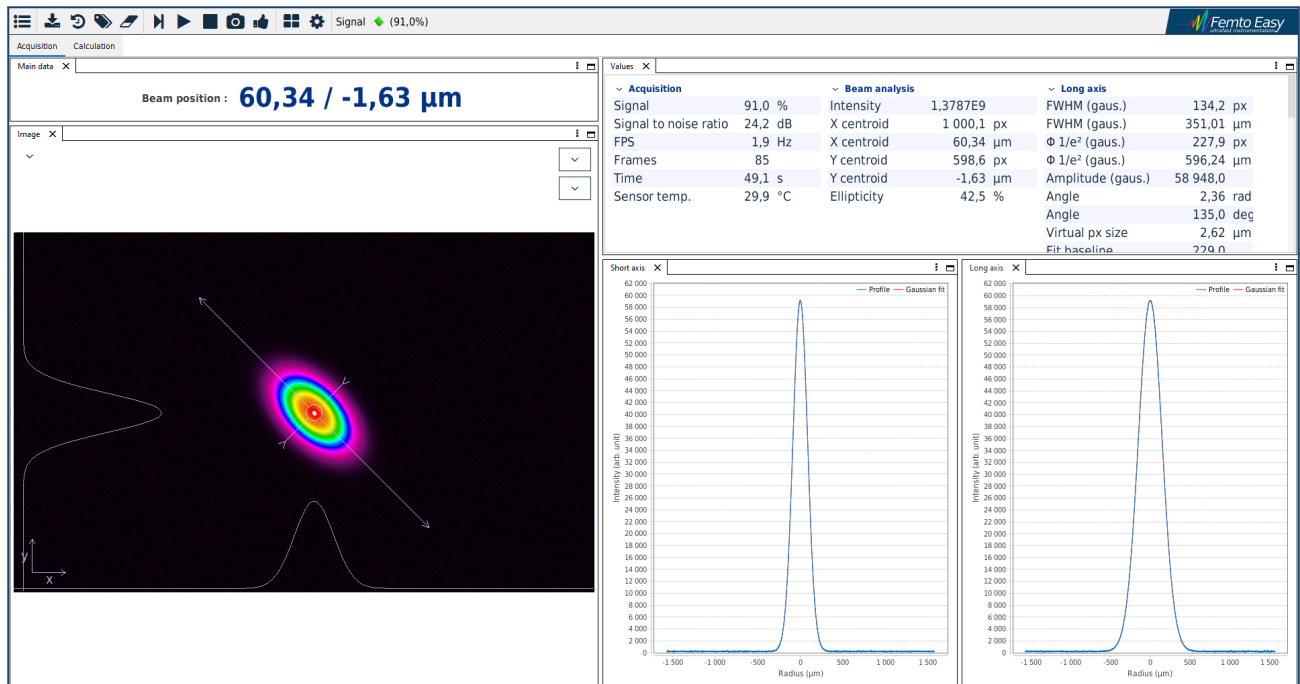

Live extraction of beam properties, even with resolutions larger than 20 Mpix



Several parameters and methods supported (ISO calculation included)



Enhanced background & hot pixels treatment, for optimum dynamic and signal to noise ratio



Client / Server interface, allowing remote control through network



Advanced logging and permanent access to 10 last acquisitions



Live comparison with up to 10 different reference acquisitions



1-click, completely configurable, export assistant