



Polarization Maintaining Fused Wavelength Division Multiplexer (980/1550)

(GK-PMWDM Series)

● Description

The Polarization Maintaining Fused Wavelength Division Multiplexer combine or separate light at different wavelengths. They offer very low insertion loss, high extinction ratio, and excellent environmental stability. These components can be operated on both fast and slow axis.

● Description

- High Extinction Ratio
- Low Insertion Loss
- Excellent Environmental Stability

● Applications

Fiber Laser

Fiber Amplifier

● Specifications

Parameter	Unit	Value
Longer Operating Wavelength	nm	1550 ±20
Max. Insertion Loss ¹	dB	0.7
Min. Isolation ¹	dB	17
Min. Extinction Ratio ²	dB	20
Shorter Operating Wavelength	nm	980 ±10
Max. Insertion Loss ¹	dB	0.7
Min. Isolation ¹	dB	17
Thermal Stability	dB/°C	≤0.005
Min. Return Loss ³	dB	55
Min. Directivity	dB	55
Max. Optical Power (Continuous Wave)	mW	300
Fiber Type ⁴	-	PM Panda Fiber
Operating Temperature	°C	- 5 to + 70
Storage Temperature	°C	- 40 to + 85



¹Test at central wavelength only. IL is 0.5 dB higher for each connector added. Connector key is aligned to slow axis.

²ER is 2 dB lower for each connector added.

³RL is 5 dB lower for connector added.

⁴For PM 980 fiber option, the components can only operate on slow axis.

● Package Dimensions

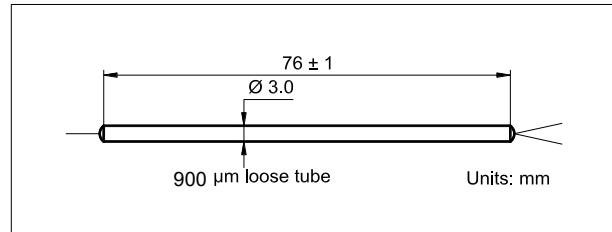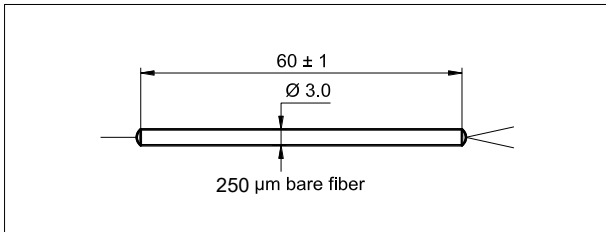

● Ordering Information

GK-PMWDM-①-②-③-④-⑤-⑥

①: Configuration

1 - 1 × 2

②: Wavelength

9801550 - 980 & 1550 nm

③: Connector Type

1 - FC/UPC 4 - SC/APC

2 - FC/APC N - None

3 - SC/UPC S - Specify

④: Fiber Jacket

B - 250 μm Bare Fiber

L - 900 μm Loose Tube

⑤: Fiber Length

Q - 0.75 m

S - Specify

⑥: Fiber Type

4 - Corning Panda PM 980

6 - Corning Panda PM 1550