


Processing specifications


Parameters

Customized specifications	
Beam Diameter	3mm,5mm,7mm,8mm,8.5mm,10mm,12mm,14mm,15mm,16mm,18mm,20mm,30mm,35mm,50mm,70mm,80mm
Wavelength	1064nm,1550nm,532nm,355nm,266nm
PV	$1/4 \lambda$ 、 $1/8 \lambda$ 、 $1/10 \lambda$
CA	$>90\%$
S/D	40-20、20-10、10-5
Coating	Dielectric Film
Length Tolerance	+0.0/-0.1mm
Width Tolerance	+0.0/-0.1mm
Thk Tolerance	+0.0/-0.05mm

Drawing

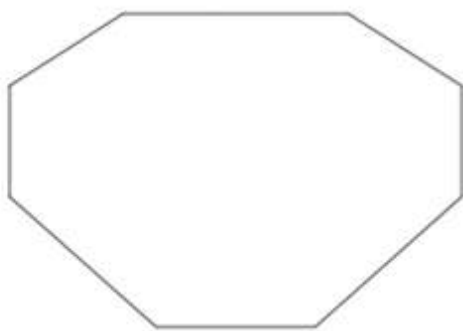

X Galvanometer

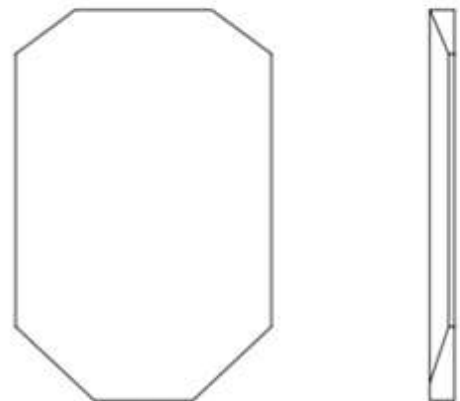

Y Galvanometer